

Inheritance

November 10, 2006

ComS 207: Programming I (in Java)
Iowa State University, FALL 2006
Instructor: Alexander Stoytchev

© 2004 Pearson Addison-Wesley. All rights reserved

Quick Review of Last Lecture

© 2004 Pearson Addison-Wesley. All rights reserved

Passing Arguments

- Another important issue related to method design involves parameter passing
- Parameters in a Java method are *passed by value*
- A copy of the actual parameter (the value passed in) is stored into the formal parameter (in the method header)
- Therefore passing parameters is similar to an assignment statement

© 2004 Pearson Addison-Wesley. All rights reserved

Passing Arguments

- Always done using “Pass By Value”

© 2004 Pearson Addison-Wesley. All rights reserved

Example: PassByValue.java

© 2004 Pearson Addison-Wesley. All rights reserved

Variable Assignment Revisited

- The act of assignment takes a copy of a value and stores it in a variable
- For primitive types:

Before: num1 38
 num2 96

num2 = num1;

After: num1 38
 num2 38

© 2004 Pearson Addison-Wesley. All rights reserved

Parameter Passing (primitive types)

- The act of passing an argument takes a copy of a value and stores it in a local variable accessible only to the method which is being called.

```

{
  int num1=38;

  myMethod(num1);
}

void myMethod(int num2)
{
  num2 =50;
}

```

Before: num1 38


Before: num2 38

After: num1 38

After: num2 50

© 2004 Pearson Addison-Wesley. All rights reserved

Objects and Reference Variables

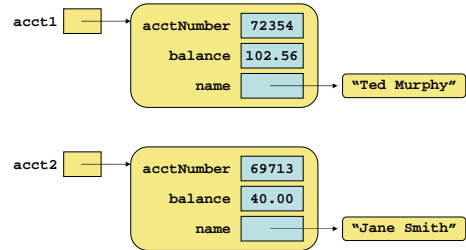

© 2004 Pearson Addison-Wesley. All rights reserved

References


- Note that a primitive variable contains the value itself, but an object variable contains the address of the object
- An object reference can be thought of as a pointer to the location of the object
- Rather than dealing with arbitrary addresses, we often depict a reference graphically



© 2004 Pearson Addison-Wesley. All rights reserved

Reference Assignment

- For object references, assignment copies the address:

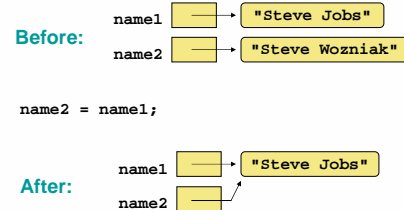

© 2004 Pearson Addison-Wesley. All rights reserved

Aliases

- Two or more references that refer to the same object are called *aliases* of each other
- That creates an interesting situation: one object can be accessed using multiple reference variables
- Aliases can be useful, but should be managed carefully
- Changing an object through one reference changes it for all of its aliases, because there is really only one object

© 2004 Pearson Addison-Wesley. All rights reserved

Parameter Passing (objects)

- Objects (in this case arrays) are also passed by value. In this case, however, the value is the address of the object pointed to by the reference variable.

```

{
  int[] a={5, 7};

  myMethod(a);
}

void myMethod(int[] b)
{
  b[0]+=5;
}

```

Before: a [5, 7]


Before: b [5, 7]

After: a [10, 7]

After: b [10, 7]


© 2004 Pearson Addison-Wesley. All rights reserved

In the previous example there is only one array and two references to it.




© 2004 Pearson Addison-Wesley. All rights reserved

The array can be modified through either reference.



© 2004 Pearson Addison-Wesley. All rights reserved

Figure 6.5

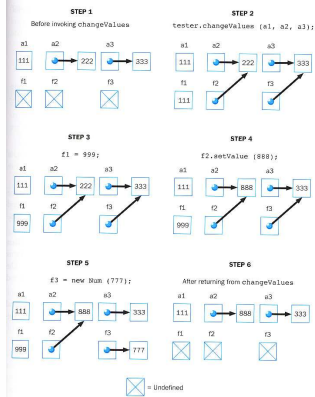

© 2004 Pearson Addison-Wesley. All rights reserved

Objects as Parameters

- When an object is passed to a method, the actual parameter and the formal parameter become aliases of each other

© 2004 Pearson Addison-Wesley. All rights reserved

Passing Objects to Methods

- What a method does with a parameter may or may not have a permanent effect (outside the method)
- See [ParameterTester.java](#) (page 327)
- See [ParameterModifier.java](#) (page 329)
- See [Num.java](#) (page 330)
- Note the difference between changing the internal state of an object versus changing which object a reference points to

© 2004 Pearson Addison-Wesley. All rights reserved

Method Overloading

- **Method overloading** is the process of giving a single method name multiple definitions
- If a method is overloaded, the method name is not sufficient to determine which method is being called
- The **signature** of each overloaded method must be unique
- The signature includes the number, type, and order of the parameters

© 2004 Pearson Addison-Wesley. All rights reserved

Method Overloading

- The compiler determines which method is being invoked by analyzing the parameters

```
float tryMe(int x)
{
    return x + .375;
}

float tryMe(int x, float y)
{
    return x*y;
}
```

Invocation

`result = tryMe(25, 4.32)`

© 2004 Pearson Addison-Wesley. All rights reserved

Method Overloading

- The `println` method is overloaded:

```
println (String s)
println (int i)
println (double d)
```

and so on...

- The following lines invoke different versions of the `println` method:

```
System.out.println ("The total is:");
System.out.println (total);
```

© 2004 Pearson Addison-Wesley. All rights reserved


Overloading Methods

- The return type of the method is not part of the signature
- That is, overloaded methods cannot differ only by their return type
- Constructors can be overloaded
- Overloaded constructors provide multiple ways to initialize a new object

© 2004 Pearson Addison-Wesley. All rights reserved

Chapter 8

Section 8.1

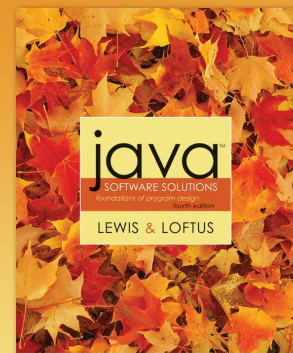

PEARSON
Addison
Wesley

© 2005 Pearson Addison-Wesley. All rights reserved.

Inheritance

- Inheritance is a fundamental object-oriented design technique used to create and organize reusable classes
- Chapter 8 focuses on:
 - deriving new classes from existing classes
 - the `protected` modifier
 - creating class hierarchies
 - abstract classes
 - indirect visibility of inherited members
 - designing for inheritance
 - the GUI component class hierarchy
 - extending listener adapter classes
 - the `Timer` class

© 2004 Pearson Addison-Wesley. All rights reserved


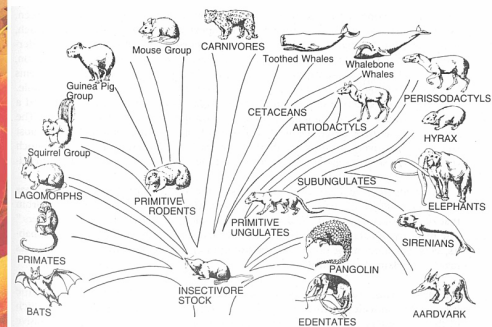


Figure 55. Diagrammatic family tree of the major orders (and some suborders) of eutherian (placental) mammals. Separate diagrams (Figs. 57–61) give in more detail the evolution of primates, carnivores, and odd- and even-toed ungulates.

© 2004 Pearson Addison-Wesley. All rights reserved


http://cas.bellarmine.edu/tietjen/images/Mammal_order_tree.jpg

Animals Class Hierarchy

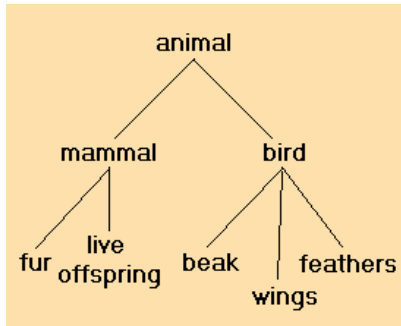


© 2004 Pearson Addison-Wesley. All rights reserved. [http://www.scs.leeds.ac.uk/ugadmit/cogsci/tech/egtree.gif]

Animals Class Hierarchy

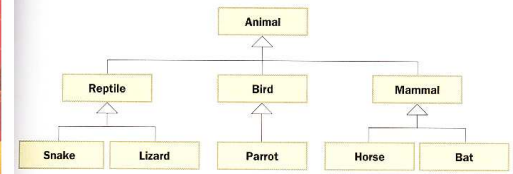


© 2004 Pearson Addison-Wesley. All rights reserved.

Inheritance Example

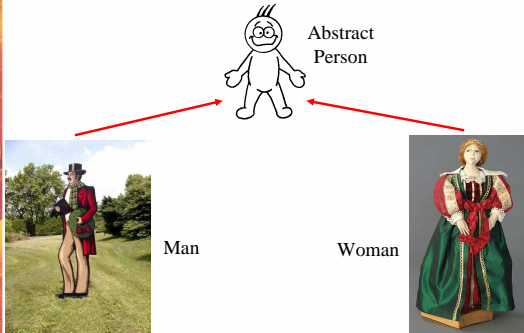

© 2004 Pearson Addison-Wesley. All rights reserved.

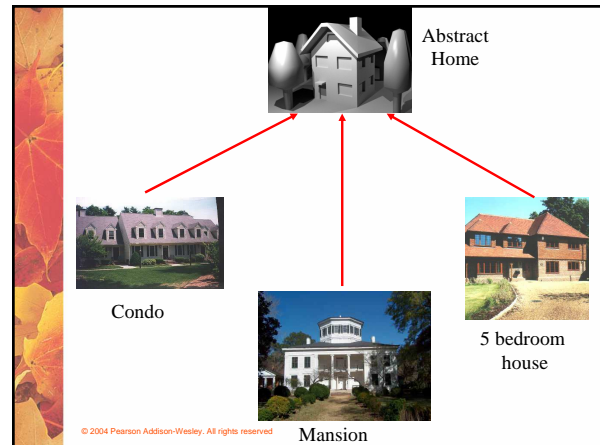

© 2004 Pearson Addison-Wesley. All rights reserved.


Inheritance

- **Inheritance** allows a software developer to derive a new class from an existing one
- The existing class is called the *parent class*, or *superclass*, or *base class*
- The derived class is called the *child class* or *subclass*
- As the name implies, the child inherits characteristics of the parent
- That is, the child class inherits the methods and data defined by the parent class

© 2004 Pearson Addison-Wesley. All rights reserved.

Inheritance

- Inheritance relationships are shown in a UML class diagram using a solid arrow with an unfilled triangular arrowhead pointing to the parent class



- Proper inheritance creates an *is-a* relationship, meaning the child *is* a more specific version of the parent

© 2004 Pearson Addison-Wesley. All rights reserved.

Inheritance

- A programmer can tailor a derived class as needed by adding new variables or methods, or by modifying the inherited ones
- *Software reuse* is a fundamental benefit of inheritance
- By using existing software components to create new ones, we capitalize on all the effort that went into the design, implementation, and testing of the existing software

© 2004 Pearson Addison-Wesley. All rights reserved

Deriving Subclasses


- In Java, we use the reserved word `extends` to establish an inheritance relationship

```
class Car extends Vehicle
{
    // class contents
}
```

- See [Words.java](#) (page 440)
- See [Book.java](#) (page 441)
- See [Dictionary.java](#) (page 442)

© 2004 Pearson Addison-Wesley. All rights reserved

Class Diagram for Words

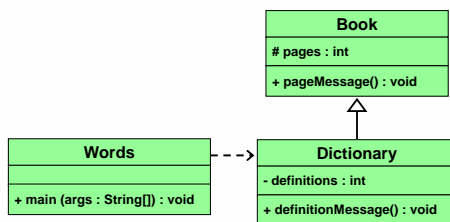

© 2004 Pearson Addison-Wesley. All rights reserved

THE END

© 2004 Pearson Addison-Wesley. All rights reserved